

Belmont Radio Corp.

Model: 6D111, Series A

Chassis:

Year: Pre 1948

Power:

Circuit:

IF:

Tubes:

Bands:




Resources

Riders Volume 15 - BELMONT 15-6

Riders Volume 15 - BELMONT 15-7

MODEL 6D111
Series A

BELMONT RADIO CORP.

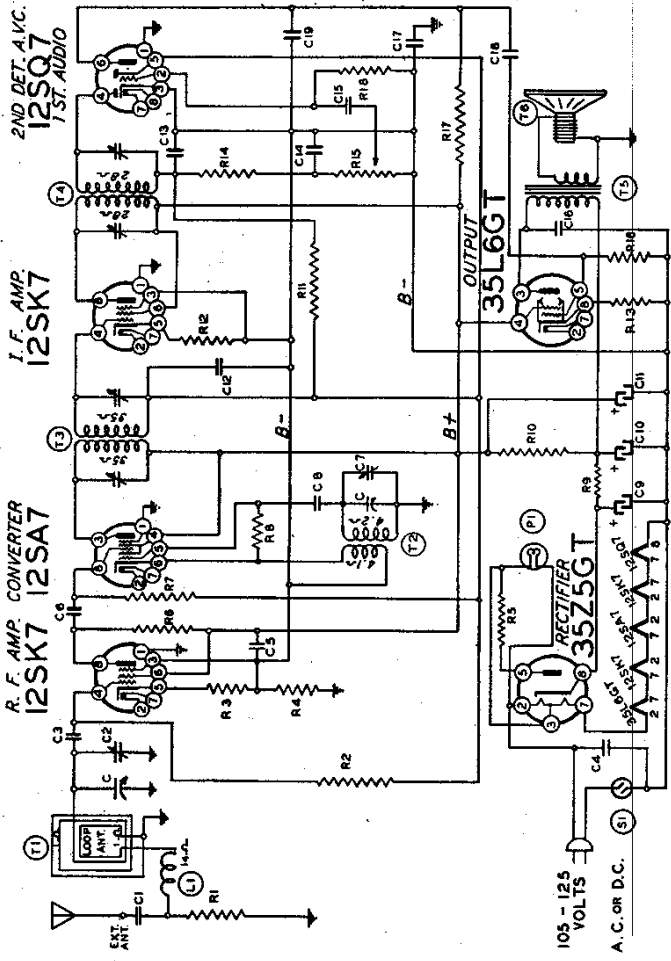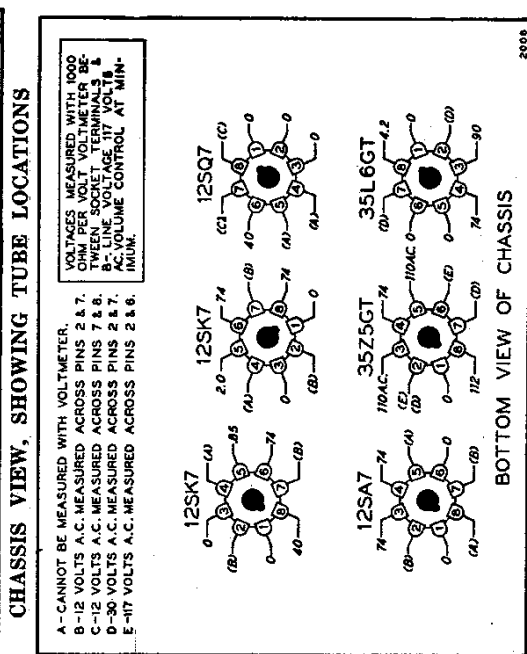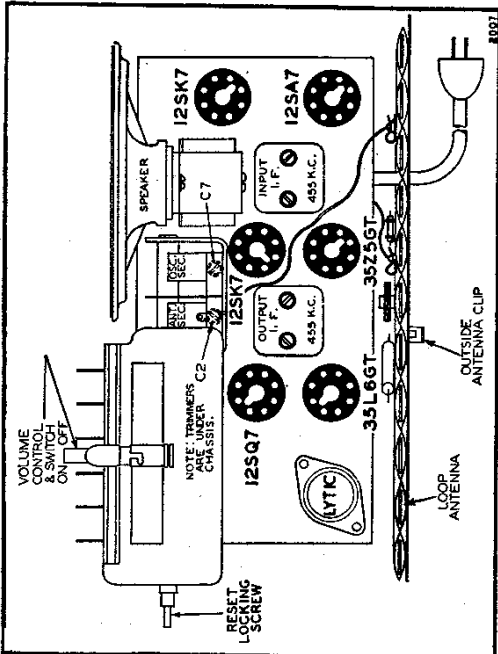

- RESISTORS
- R1 4700 ohms, 1/2 w., ±10%
 - R2 1 megohm, 1/2 w., ±20%
 - R3 100 ohms, 1/2 w., ±10%
 - R4 150,000 ohms, 1/2 w., ±10%
 - R5 22 ohms, 1/2 w., ±10%
 - R6 4700 ohms, 1/2 w., ±20%
 - R7 100,000 ohms, 1/2 w., ±20%
 - R8 47,000 ohms, 1/2 w., ±20%
 - R9 200 ohms, 1 w., ±10%
 - R10 200 ohms, 1 w., ±10%
 - R11 200 ohms, 1 w., ±10%
 - R12 300 ohms, 1/2 w., ±10%
 - R13 150 ohms, 1/2 w., ±10%
 - R14 47,000 ohms, 1/2 w., ±20%
 - R15 Volume control, 1 megohm
 - R16 470,000 ohms, 1/2 w., ±20%
 - R17 220,000 ohms, 1/2 w., ±20%
 - R18 4.7 megohms, 1/2 w., ±20%
- CONDENSERS
- C 2 gang variable
 - C1 .002 x 800 volts
 - C2 Antenna trimmer on gang
 - C3 .0005 mica
 - C4 .1 x 400 volts
 - C5 .25 x 200 volts
 - C6 .0001 mica
 - C7 Oscillator trimmer on gang
- MISCELLANEOUS
- L1 Loading coil
 - L2 Pilot light bulb, type T-47
 - S1 On-off switch on volume control antenna, complete
 - T1 Oscillator coil, 455 Kc.
 - T2 Input I.F. coil, 455 Kc.
 - T3 Output I.F. coil, 455 Kc.
 - T4 Output transformer for speaker
 - T5 5-inch P.M. speaker
- NOTE: C9, C10, C11 are in same unit. In 25-cycle sets, values are 60 mfd., 40 mfd., 40 mfd.

Sensitivity (for 0.05 watt output).....10 microvolts average
 Intermediate frequency.....455 Kc.
 Power consumption.....35 Watts

